





EAN code:
8595188183994

Technical parameters		RFSLT-S3
Power supply	Battery (lithium cell SAFT LS14500 (AA) 3.6 V/2600 mA) operating time up to 5 months	
Input	standard 3m	
Probe cable length:	standard 0-3m H ₂ O (other by agreement)	
Measuring range:	approx. every 2.5 min	
Measurement interval:		
Output		
Relay:	up to 6 wireless iNELS relays	
Output update frequency:	after every measurement	
Accuracy:	± 0,5%	
Time response:	≤ 100ms	
long-term stability:	≤ ± 0,2 % span / year under reference conditions	
Mechanical stability:		
vibrations	10g, 25 Hz...2 kHz	
shocks	100g / 1ms	
Electrical resistance		
Short circuit protection:	permanent	
Reverse polarity protection:	approx. 1 year (according to ambient temperature cycling)	
Electromagnetic compatibility:	radiation and immunity to interference according to EN 61326	
Control		
<i>iNELS standard</i>		
Communication protocol:	RFIO	
Frequency:	866–922 MHz (for more information see p. 81)	
Repeater function:	no	
Manual control:	application	
Range:	in open space up to 200 m	
<i>Bluetooth</i>		
Communication protocol:	Bluetooth Low Energy	
Frequency:	2.4GHz	
Repeater function:	no	
Manual control:	application	
Range:	in open space up to 50 m	
Other data		
Operating temperature:	–20 ... +40 °C	
Working position:	any	
Mounting:	screws	
Protection:	IP65, probe IP68	
Recommended power cable:	The sensor including the cable is included in the package	
Dimension:	136 x 62 x 34 mm	
Weight:	150 g	
Standards:	EN 60730, EN 63044, EN 300 220, EN 301 489, EN 300 328	



- It measures the level of liquids based on the principle of hydrostatic pressure measurement.
- It consists of a communication unit in a plastic case with IP65 protection placed above the surface and a stainless steel pressure probe connected by a cable lowered to the bottom of the tank.
- The standard length of the probe cable is 3m or 9m.
- The unit communicates wirelessly via the RFIO2 protocol with the devices of the iNELS Wireless system and is powered by a SAFT LS14500 (AA) 3.6 V/2600 mA lithium battery. The range of the switching actuators from the unit is determined by the building/location, in open space it is normally 200 meters.
- The unit can also communicate with the eLAN-RF-103 gateway, which conveys level information to the iNELS application.
- In the application, it is possible to manage switching actors, edit notifications, continuously monitor the level, pressure, temperature and battery discharge status in the unit.
- The unit itself is set up via the iSonda application from an Android/iOS smartphone via the Bluetooth interface (LowEnergy, 4.1 and higher).

Function

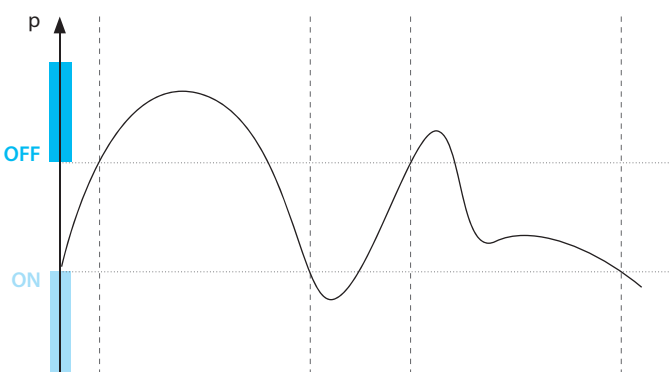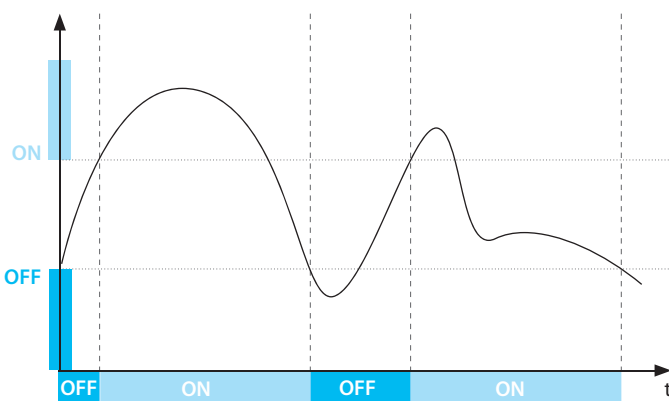


Materials (in contact with the medium)


Housing:	stainless steel 1.4301 (304)
Seal:	FKM
Membrane:	stainless steel 1.4435 (316 L)
Cable jacket:	PUR

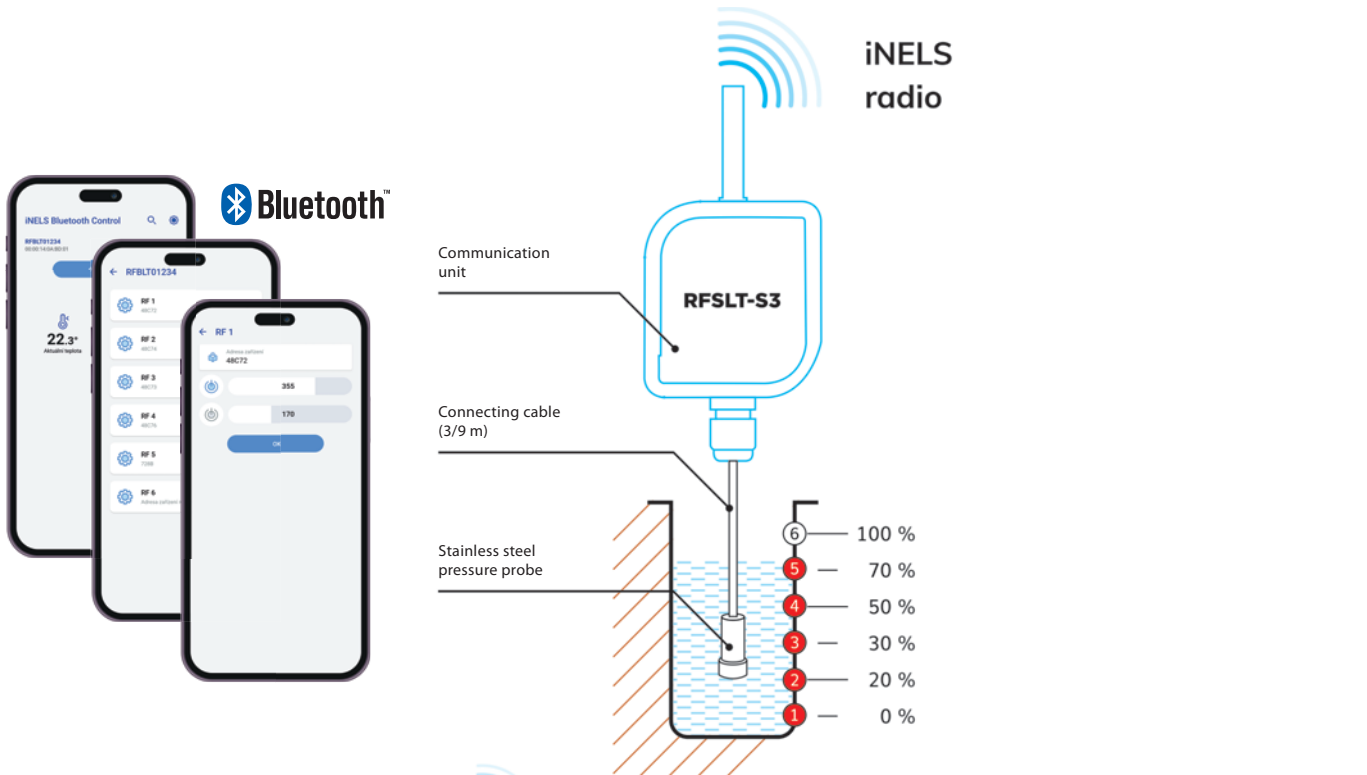


Smart RF box



Signaling via the application on the phone

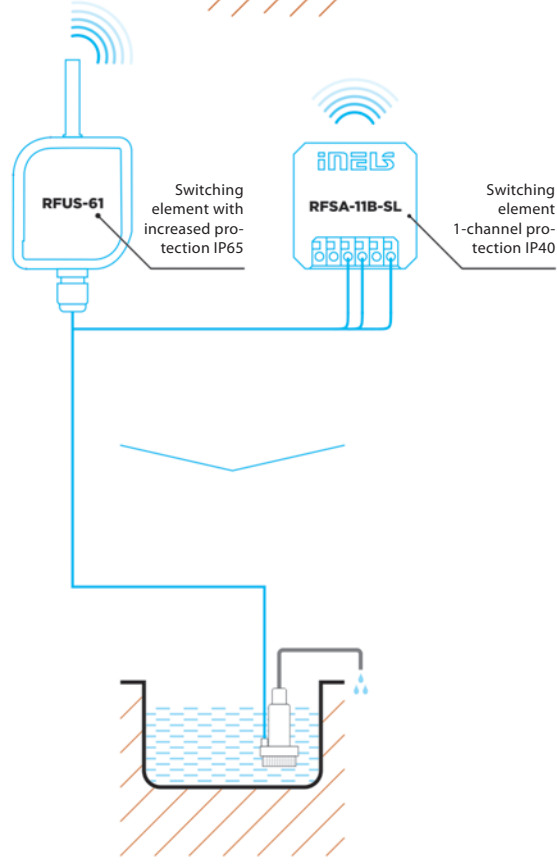

Control of 1 pump: **RFSFA-11B-SL, RFUS-61**
Control of 2 pumps: **RFSFA-62B-SL**

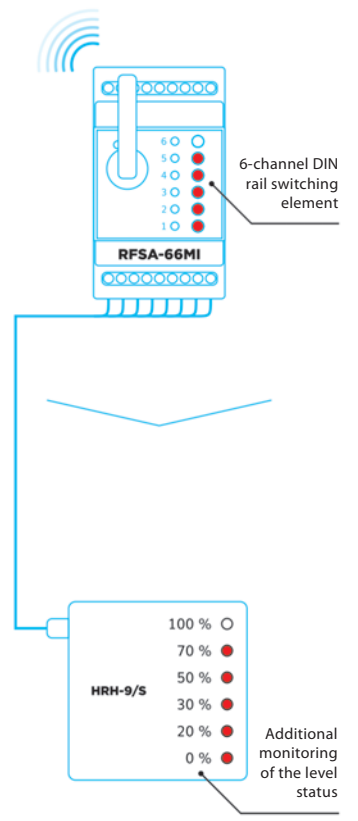

Control/signaling, 6x output
(eg: MAX / MIN / CRITICAL MAX / CRITICAL MIN)

Additional monitoring of the level status